

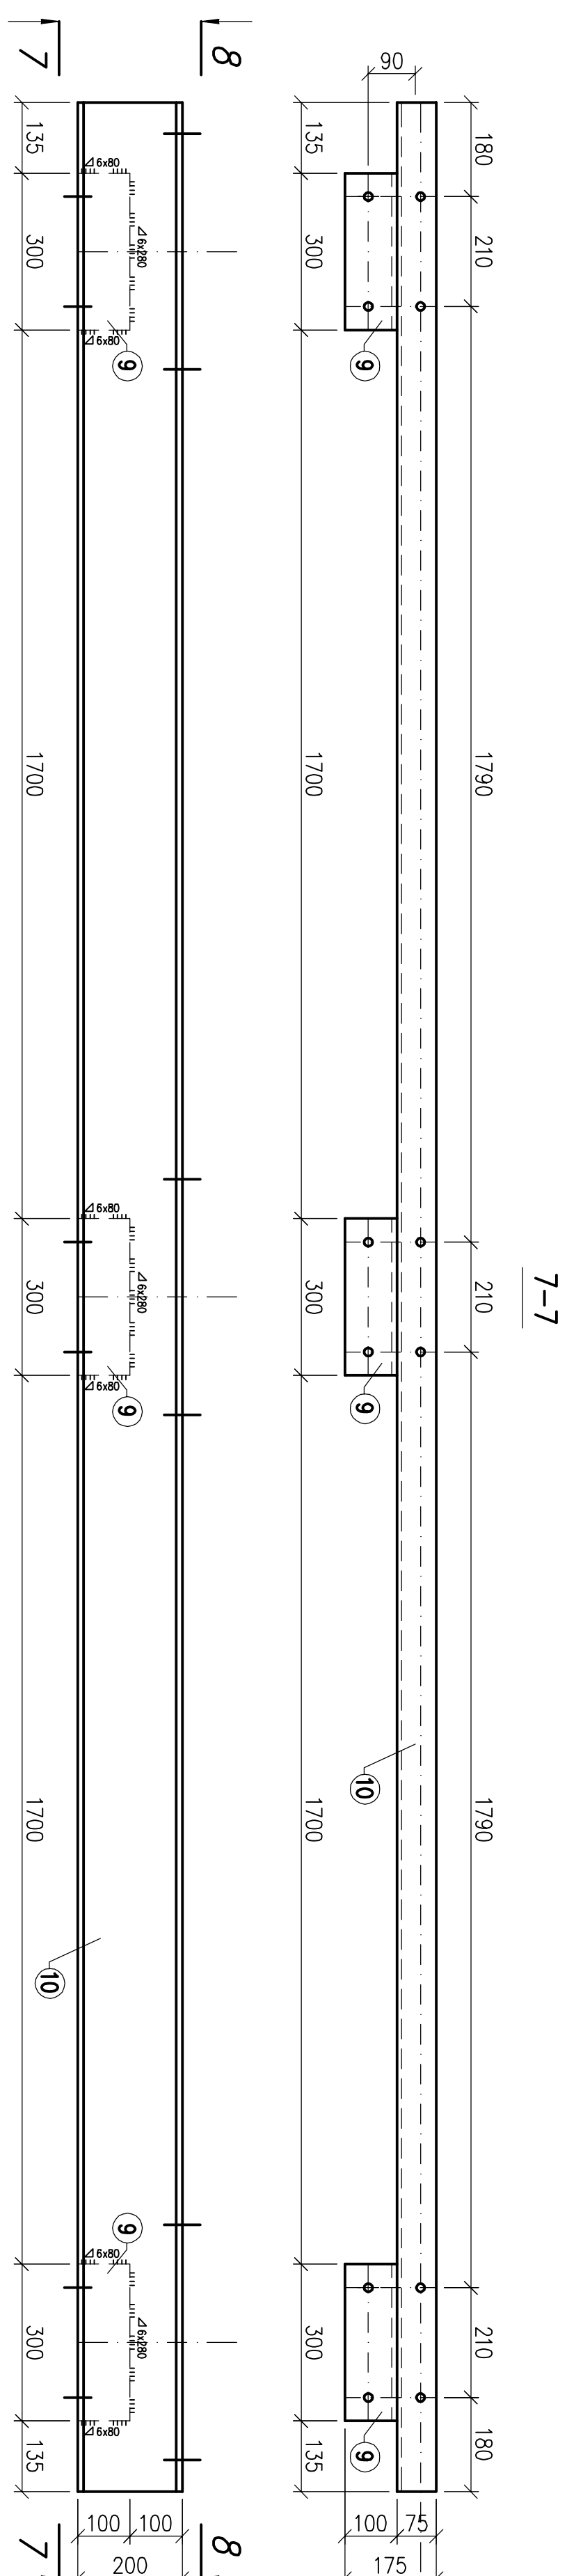

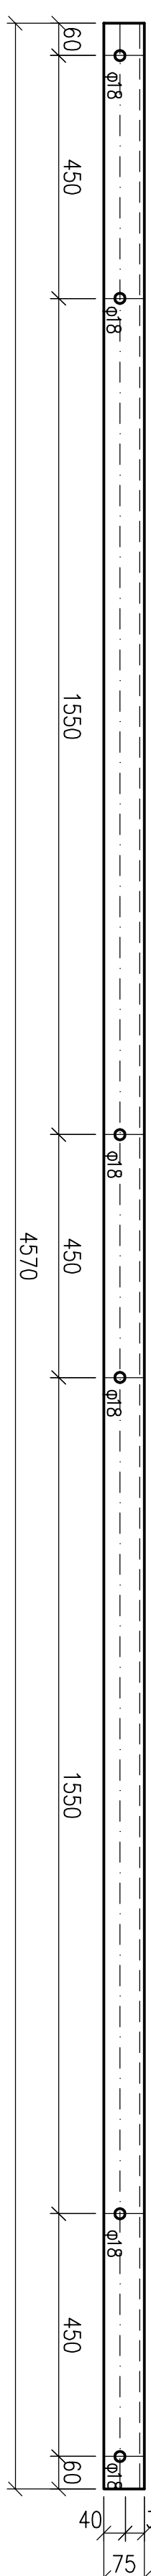
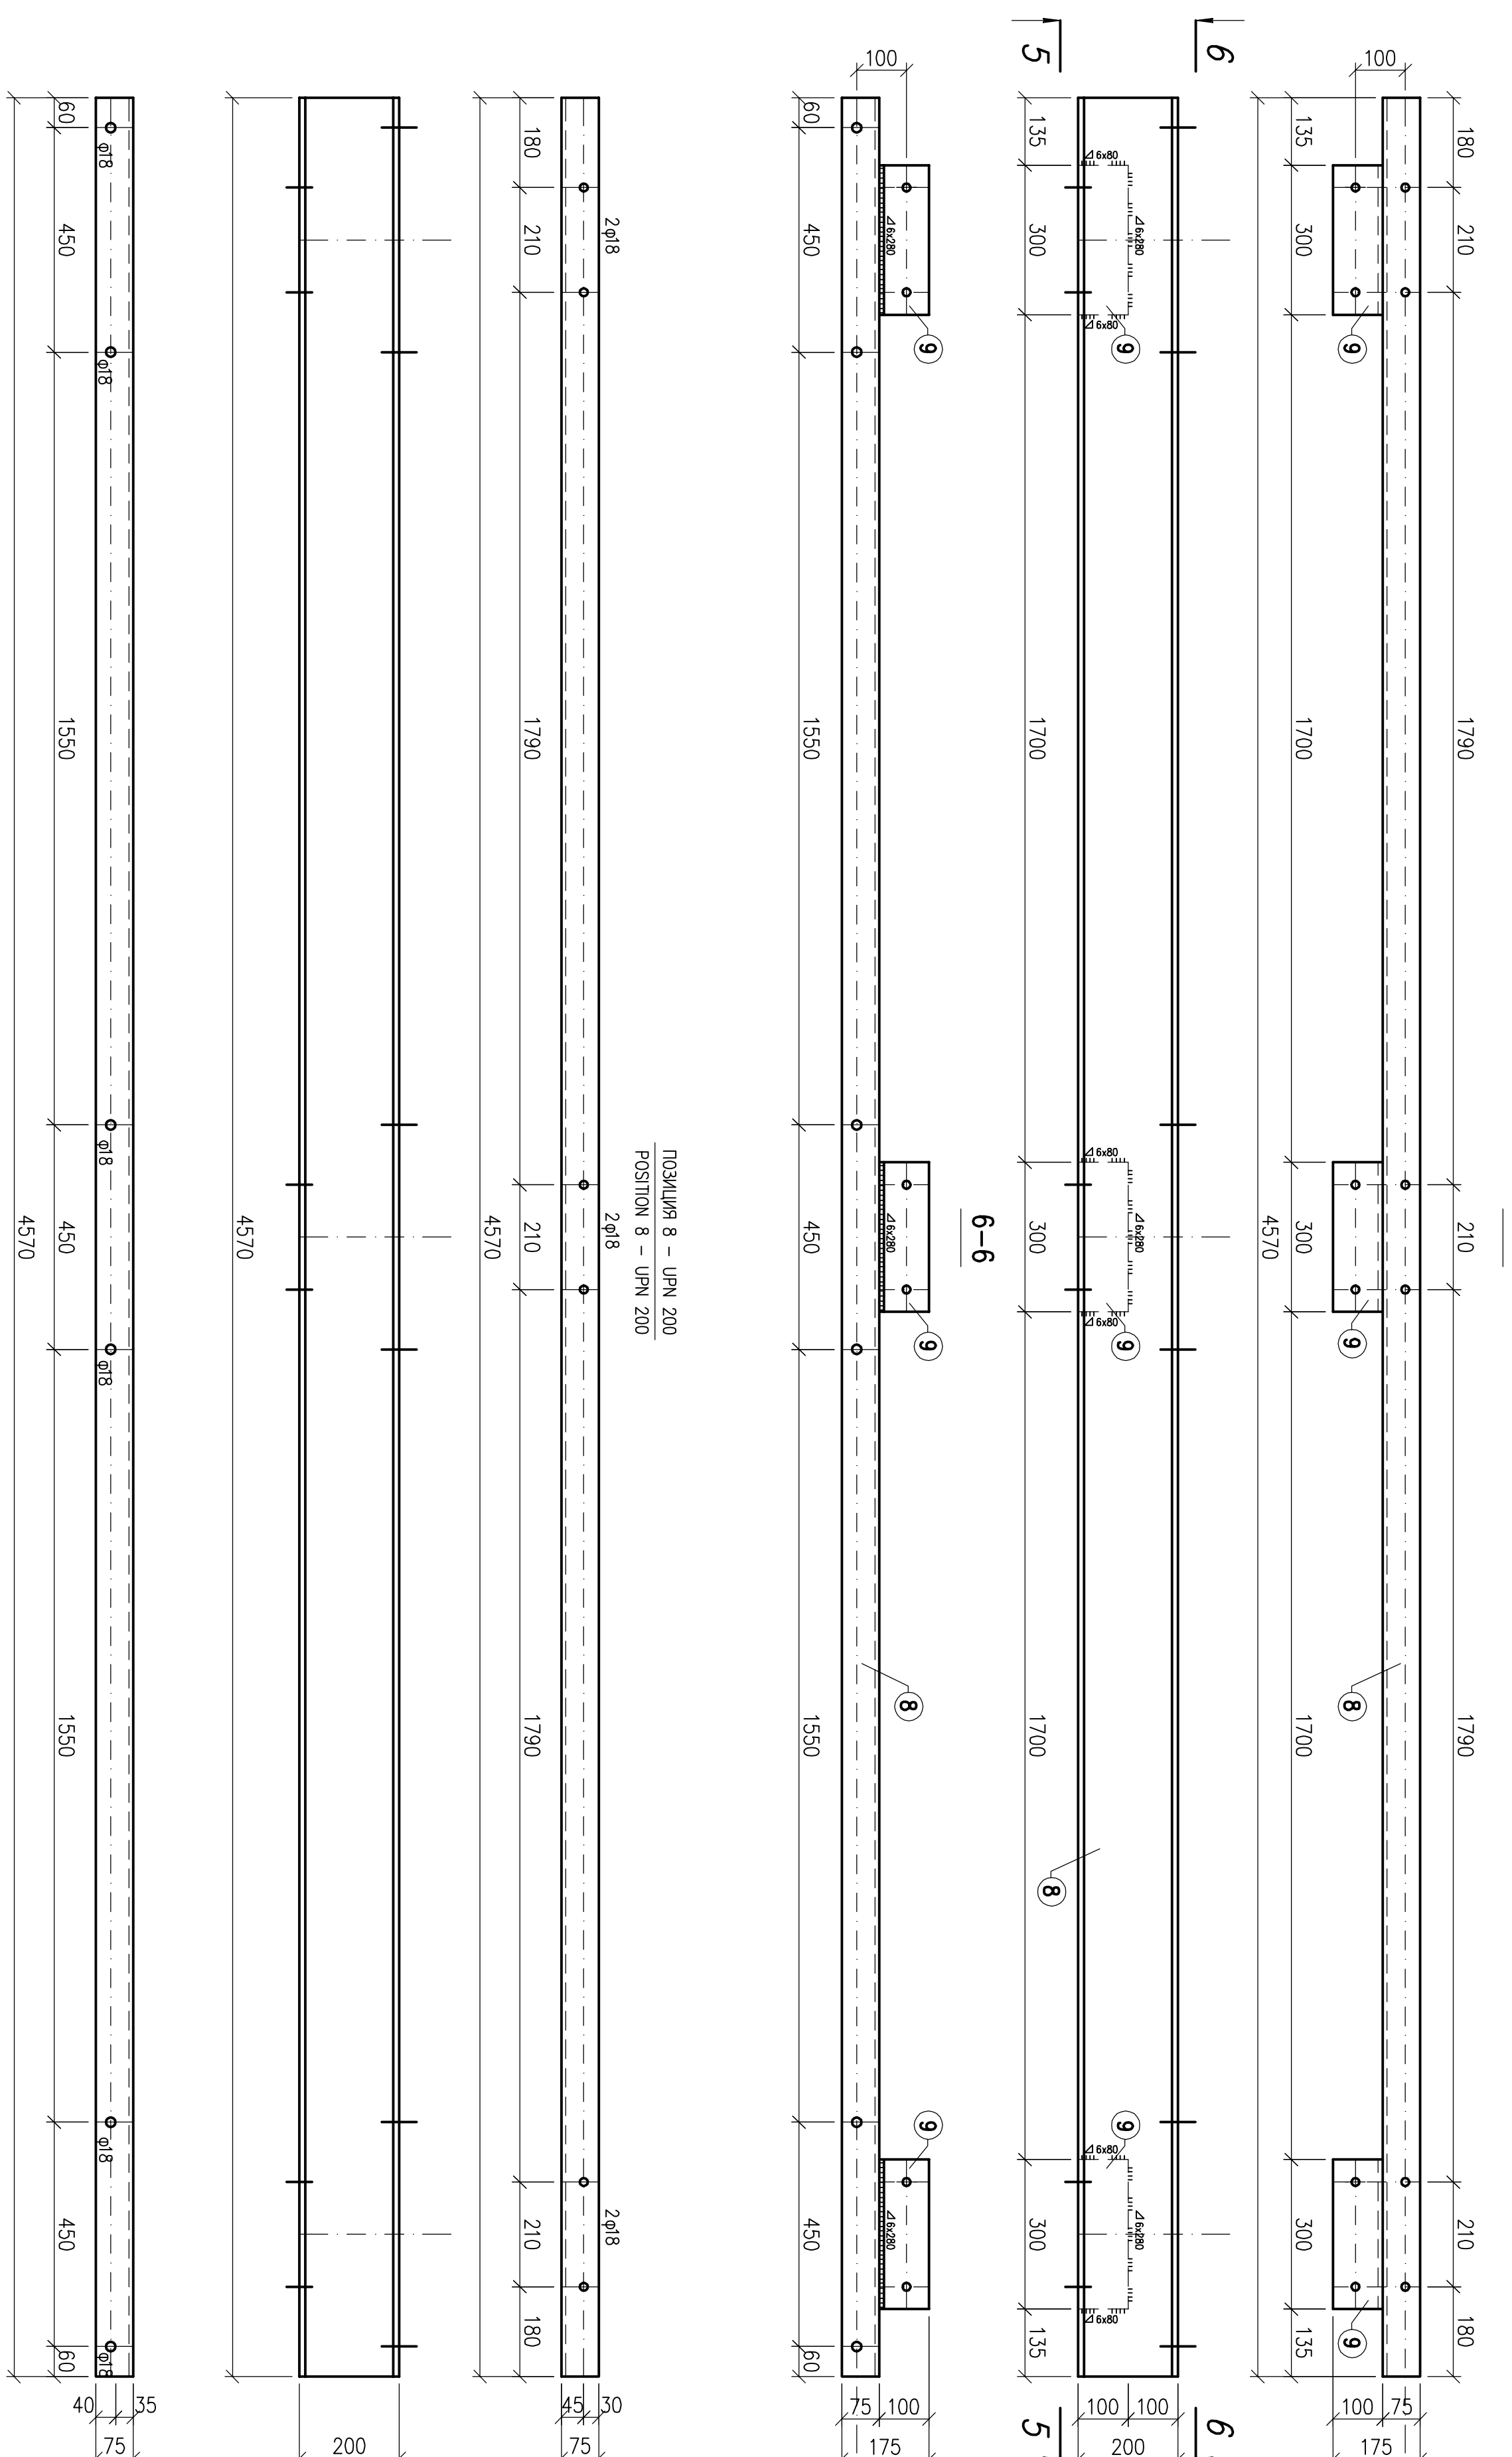
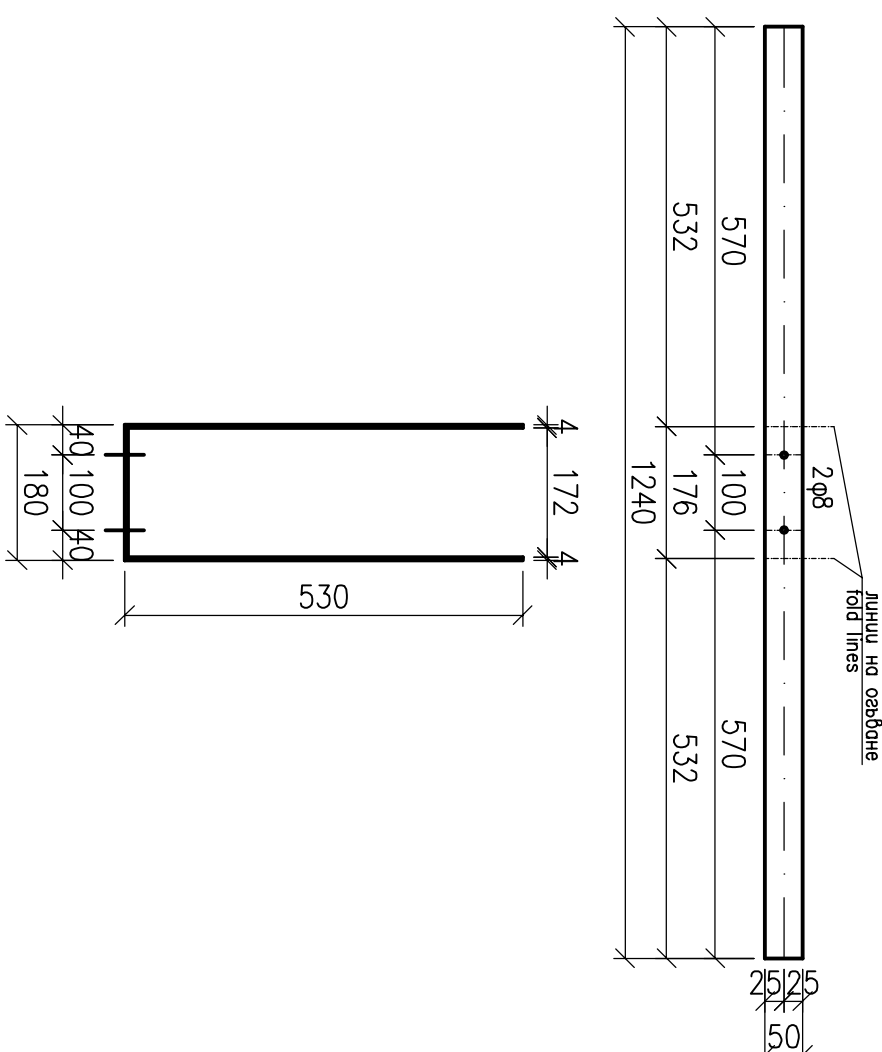
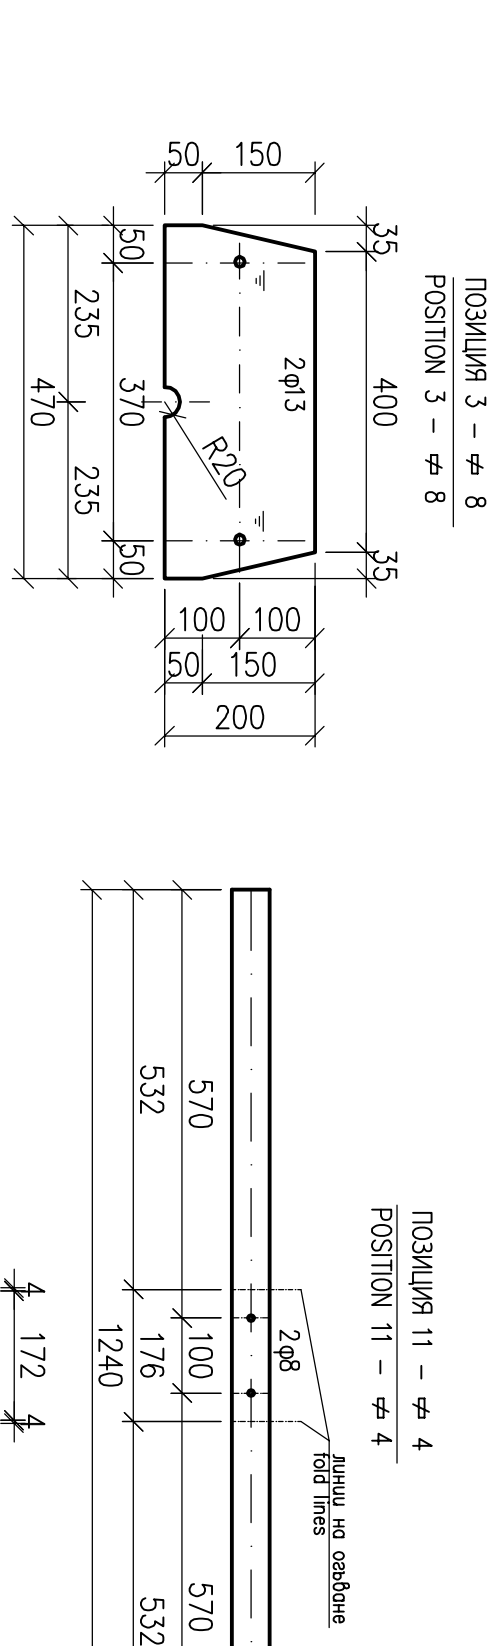
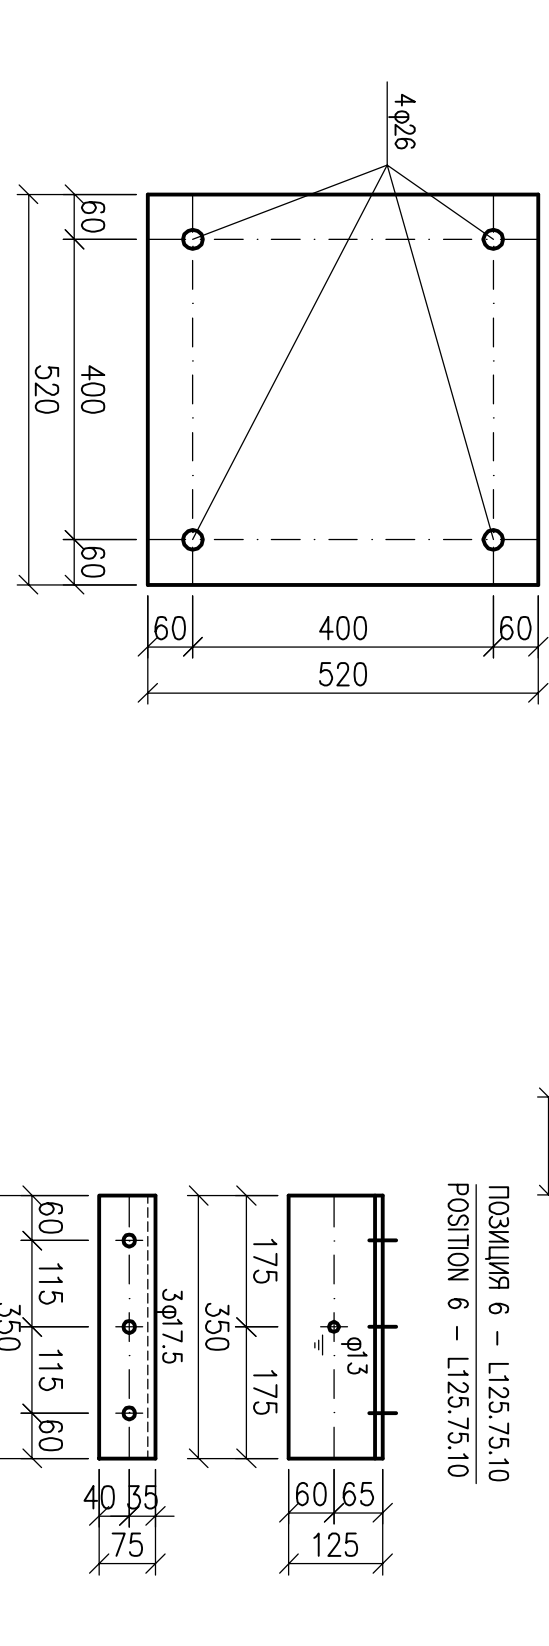
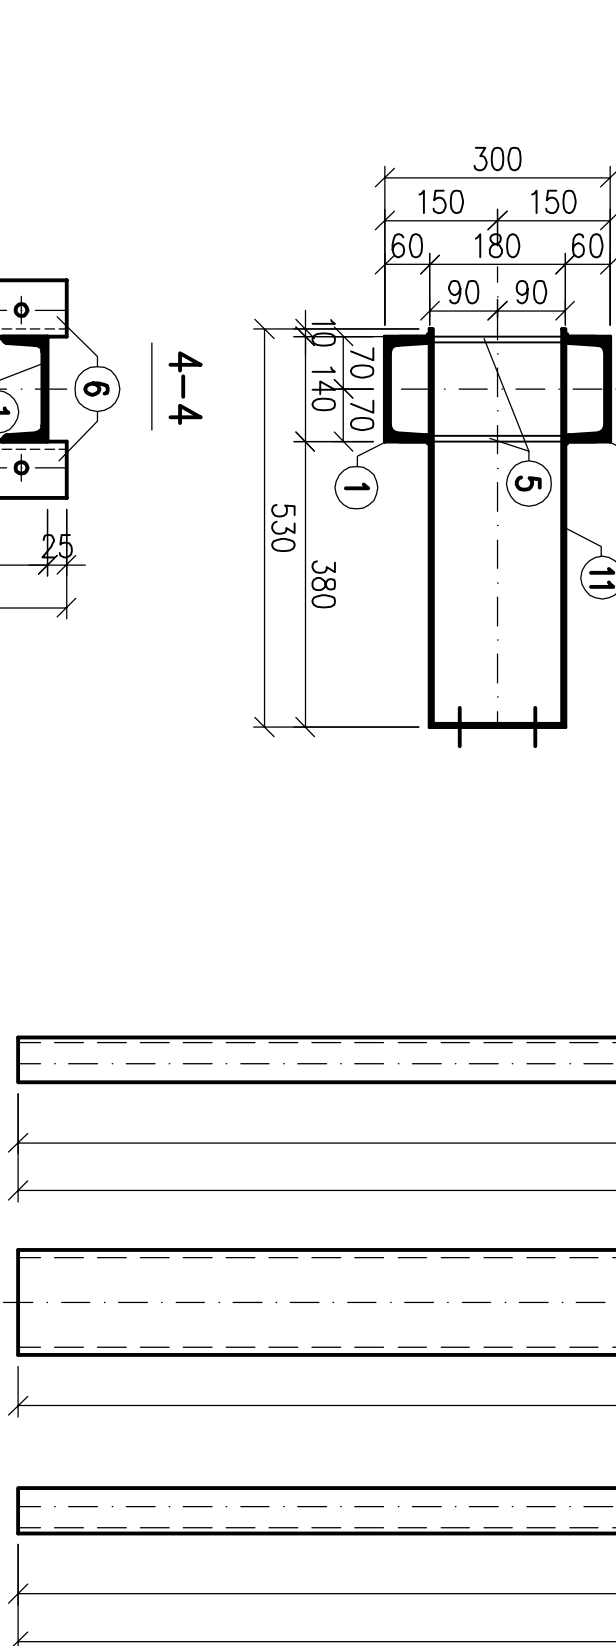
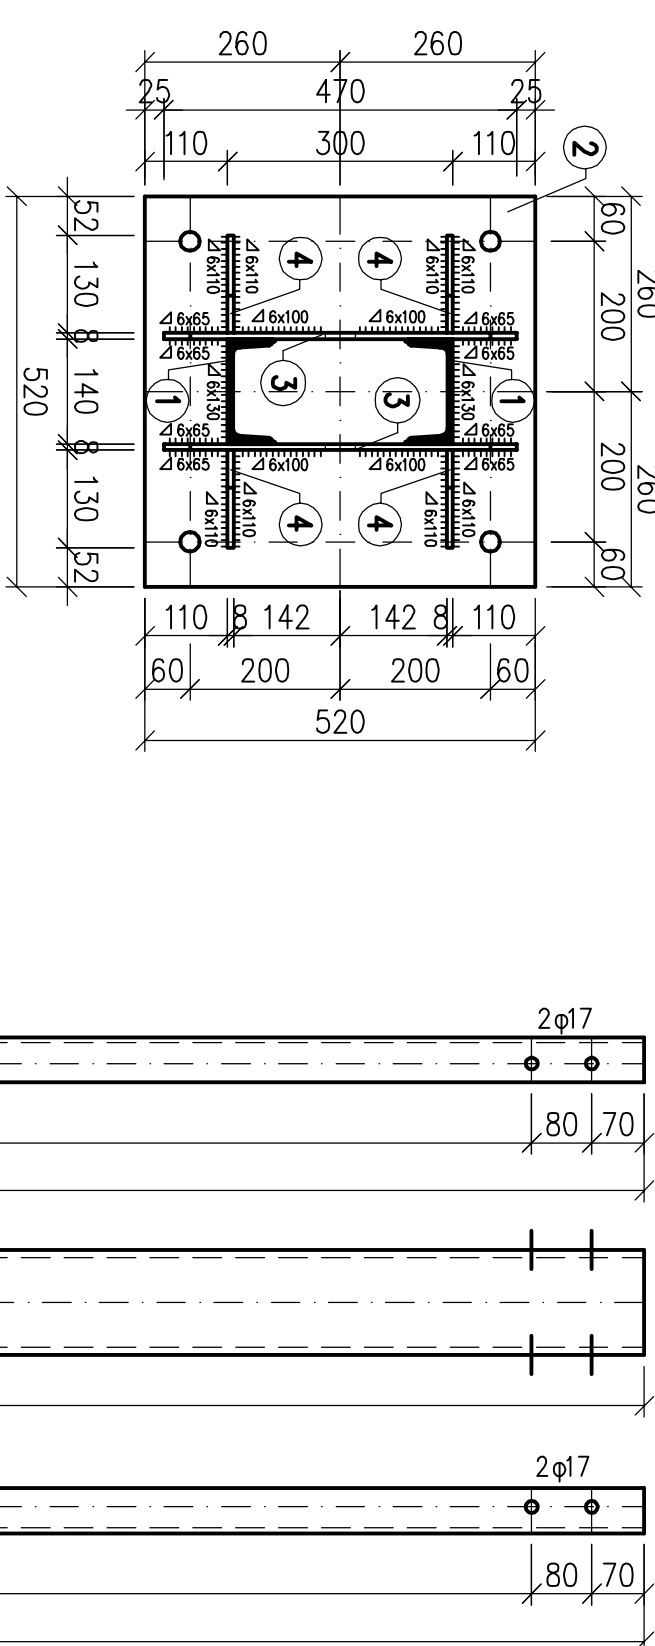
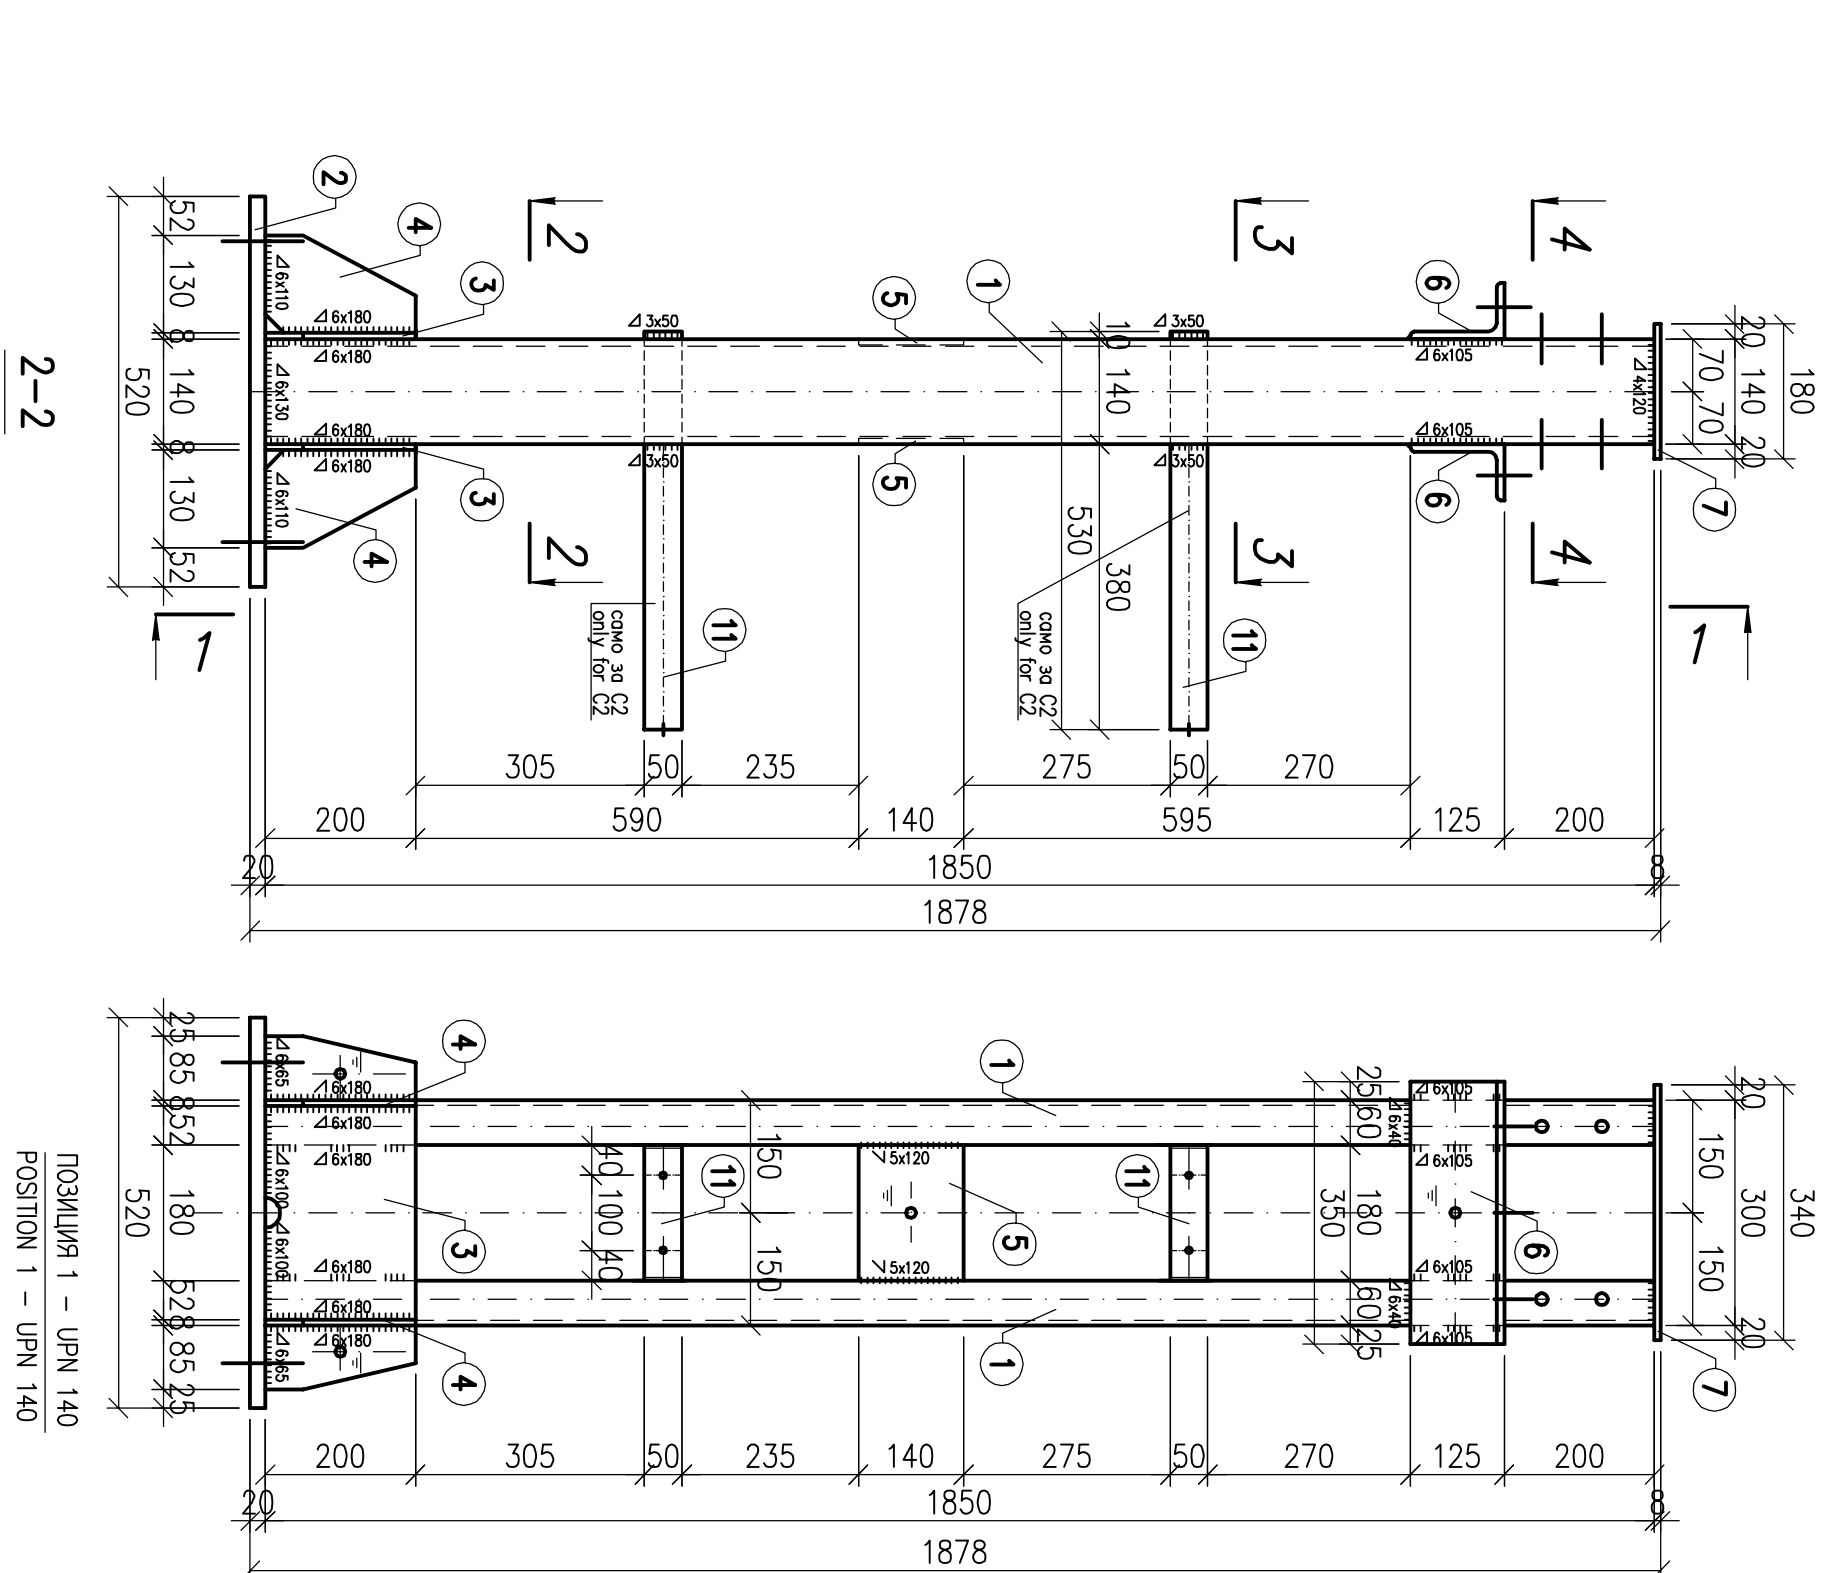


Beam B2 - 36p.
Beam B2 - 36p.

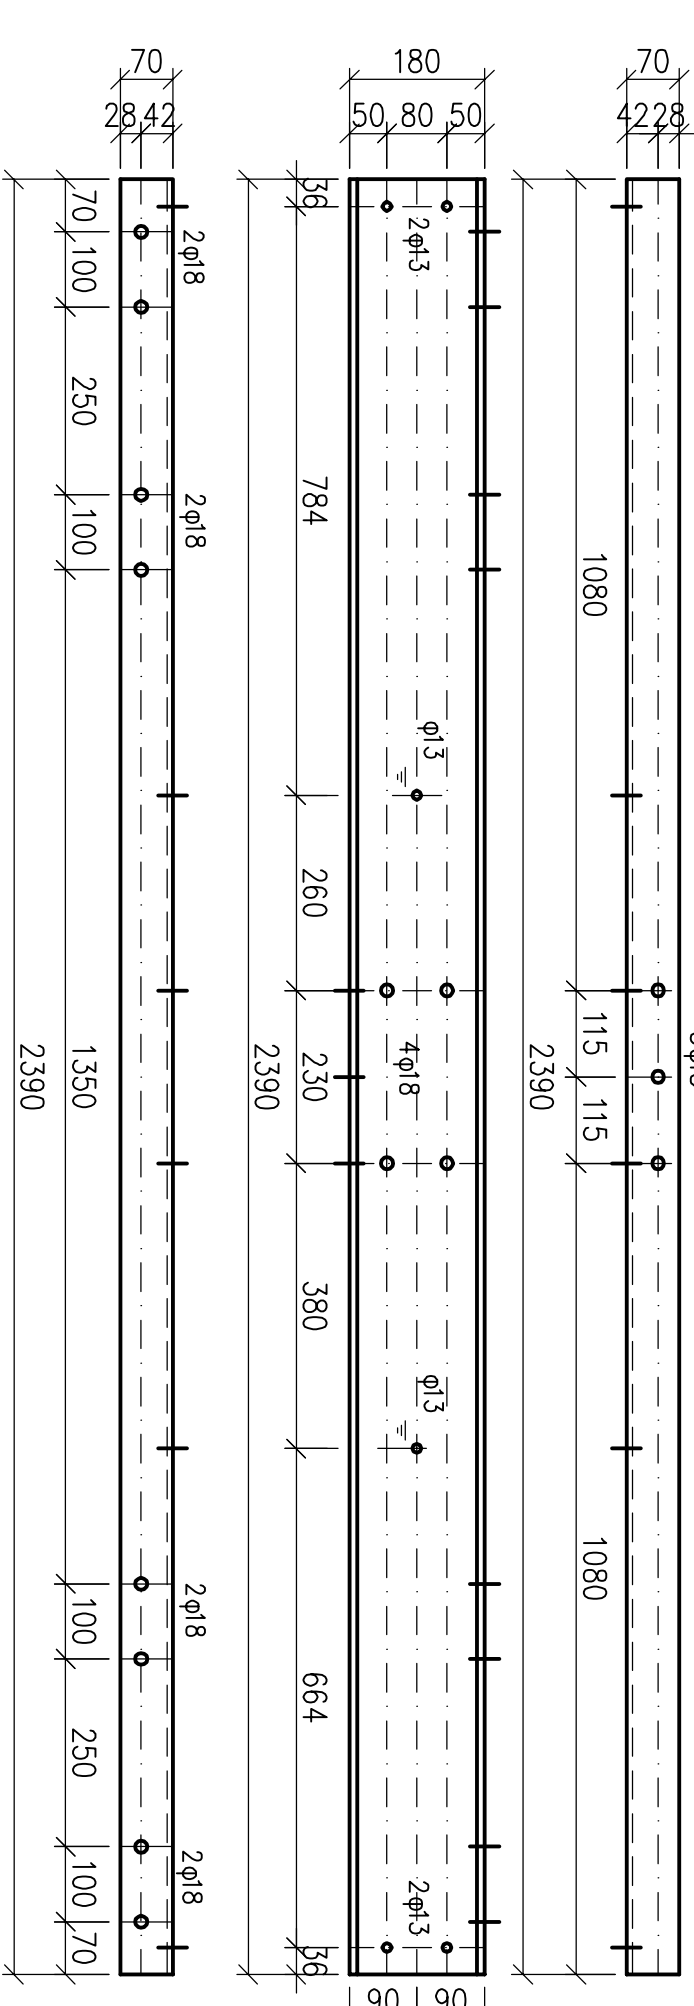

Съвързващ елемент CE1 – брус.
Connecting element CE1 – brcs

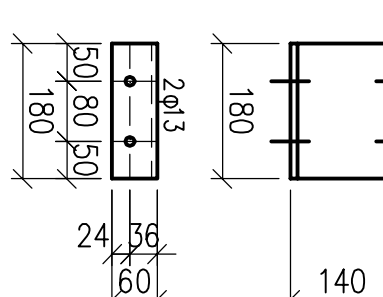

1. Before installing all steel structures should be cleaned of the rust with a scrubbing brush and the individual elements should be galvanized.
2. Each welding should be performed by qualified welders.
Clean the slag before zinc-coating.
The ends of welded parts to be prepared according to the requirements of BDS 3117-85.
3. For every element should be done – cleaning and hot dip galvanizing in accordance with the thickness of the zinc coating 85 microns.

[illegible][illegible]

4570

102

180

100

LEGEND / ЛЕГЕНД

weld assembly / номинально заборная

welding factory / заборная фабрика

Материалы		Кол-во	Единица измерения	Цена
Сталь	Сталь	1	тонна	463.01W 020 02 0 - F
Сварочные материалы	Сварочные материалы	2	тонна	463.01W 020 02 0 - F
Сварочные материалы	Сварочные материалы	2	тонна	463.01W 020 02 0 - F