


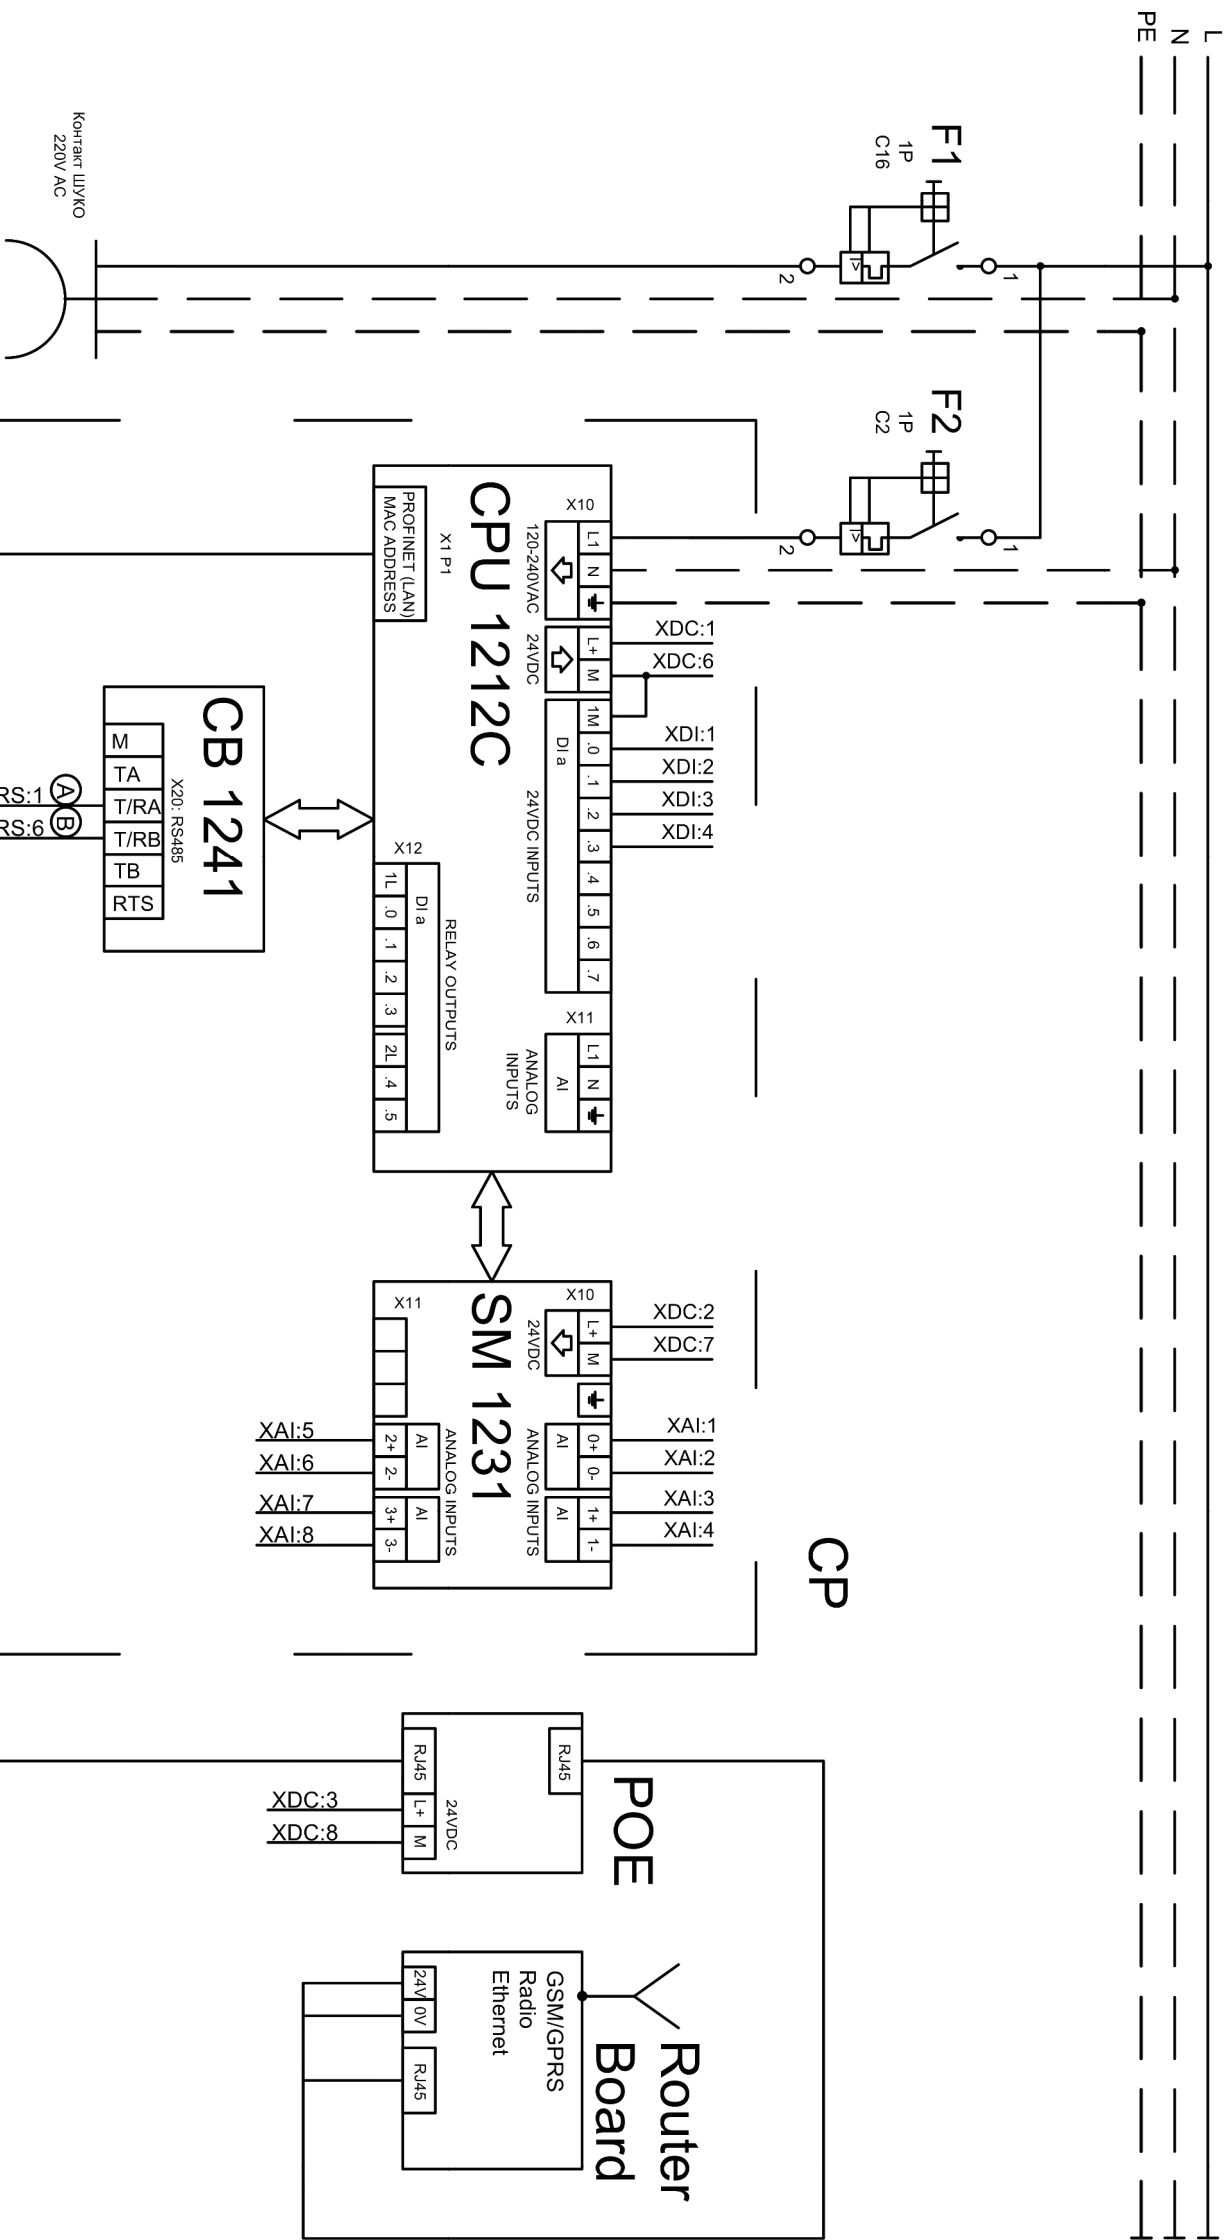

Апаратура		Марка	Коліктивство
№	Найменування		
1	F1 - 1р, iC60N - 16A, C	6р.	1
2	F2 - 1р, iC60N - 2A, C	6р.	1
3	Контак "ШУКО" 220V AC	6р.	1
4	SIMATIC ST-1200 - CPU 1212C	6р.	1
5	ANALOG INPUT - SM 1231 - 4AI	6р.	1
6	COMMUNICATION BOARD - CB 1241 RS485	6р.	1
7	ROUTER BOARD + GSM/GPRS	6р.	1
8	POE - Power over Ethernet	6р.	1
9	Антенa	6р.	1
10	Клема редова 2,5 мм ²	6р.	21
11	Клема редова 2,5 мм ² синя	6р.	6
12	Клема редова 2,5 мм ² РЕ	6р.	1
13	Клема крайня (оранжичител)	6р.	5
14	Мост 5 pin - за клема 2,5 мм ²	6р.	2
15	Мост 2 pin - за клема 2,5 мм ²	6р.	2
16	Кабел ПВ-А2 (H07V-K) 0,75 мм ²	м.	6,1
17	Кабел ПВ-А2 (H07V-K) 1,5 мм ²	м.	2,2
18	Кабел ТПЧК 2X0,75 мм ²	м.	0,2
19	Кабел ПАЧ cat5e	м.	1
20	Шуцер PG-16	6р.	1
21	Шуцер PG-13,5	6р.	1
22	Шуцер PG-9	6р.	5

XDC	+24V DC	
	1	♀ +24V - CPU-X10:L+
	2	♀ +24V - SM-X10:L+
	3	♀ +24V - POE:L+
	4	♀
	5	♀
	0V DC	
	6	♀ 0V - CPU-X10:M
	7	♀ 0V - SM-X10:M
	8	♀ 0V - POE:M
	9	♀
	10	♀

XRS	A	
	1 	A - CB-X20:T/RA
	2 	
	B	
	3 	B - CB-X20:T/RB
	4 	

XDI	+24V DC INPUT	
	1 	+24V - CPU-X10:.0
	2 	+24V - CPU-X10:.1
	3 	+24V - CPU-X10:.2
	4 	+24V - CPU-X10:.3

XAI	AI 0	
	1 ☐	SM-X10:AI0+
	2 ☐	SM-X10:AI0-
	AI 1	
	3 ☐	SM-X10:AI1+
	4 ☐	SM-X10:AI1-
	AI 2	
	5 ☐	SM-X11:AI2+
	6 ☐	SM-X11:AI2-
	AI 3	
	7 ☐	SM-X11:AI3+
	8 ☐	SM-X11:AI3-